

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 April 2005 (07.04.2005)

PCT

(10) International Publication Number  
**WO 2005/031991 A1**

(51) International Patent Classification<sup>7</sup>: **H04B 1/03**

(21) International Application Number:  
PCT/KR2004/002472

(22) International Filing Date:  
24 September 2004 (24.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10-2003-0067731  
30 September 2003 (30.09.2003) KR

(72) Inventor; and

(75) Inventor/Applicant (for US only): JEONG, Dae Soo  
[KR/KR]; Hyundai Apt. 701-1306 Ami-ri, Bubal-eub  
Icheon-si., Gyeonggi-do 467-860 (KR).

(74) Agent: AN, Kook Chan; Hannuri Bldg. 219 Nacja-dong.,  
Chongno-gu., Seoul 110-053 (KR).


(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): UT-  
Starcom Korea Limited [KR/KR]; San 136-1, Ami-ri,  
Bubal-eub Icheon-si., Kyongki-do 467-701 (KR).

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: LOCKING MEMBER FOR LOCKING A CARD WITH RESPECT TO A SHELF

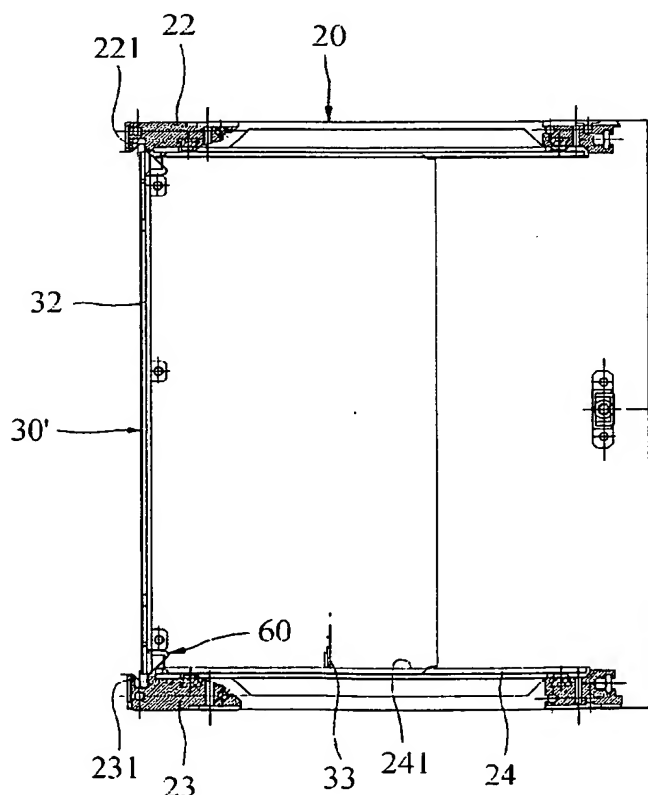

(57) Abstract: A locking member functions to lock a card with respect to a shelf having an end with a groove upon completing a card loading process into the shelf. The locking member is provided with (1) a connecting section joined to the card, (2) a resilient section extending from the connecting section and having resilience, and (3) an engagement section formed at an end of the resilient section and having a shape engagable into the groove. The locking member is also provided with an extension section extending from the engagement section. When the extension section is pressed, a position of the engagement section is lowered due to shrinkage of the resilient section.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report